
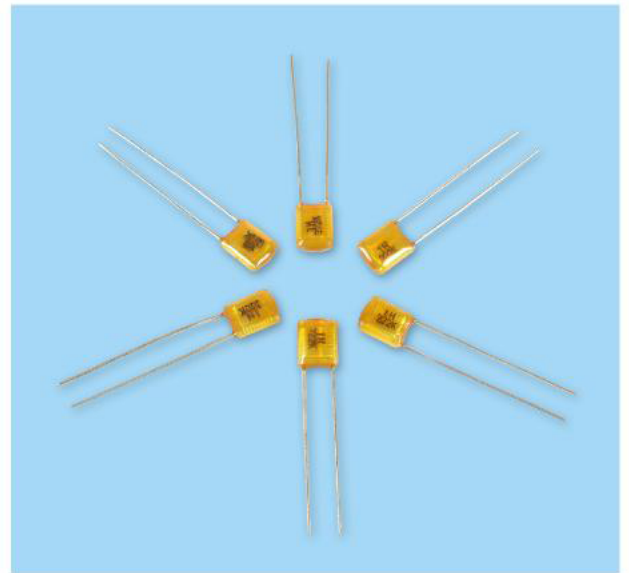


POLYESTER FILM CAPACITOR(MINIATURE & SUPER-MINIATURE TYPE) INDUCTIVE WELDED CONSTRUCTION, EPOXY DIP COATED.

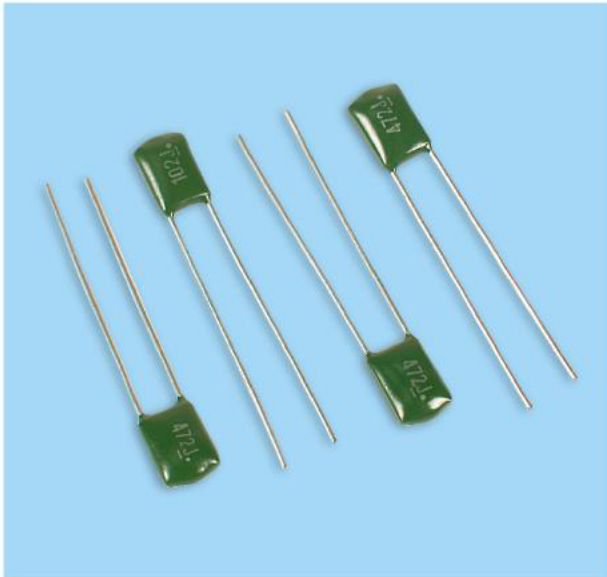

MINIATURE / 小型 CQ92MM

DIMENSIONS / 尺寸 (UNIT : mm)

uF \ VDC	100V			
	W	H	T	P
0.00047-0.003	5.0	7.5	2.5	4.0
0.0033-0.0068	5.5	7.5	3.0	4.0
0.0082-0.01	6.0	7.5	3.0	4.0
0.012	5.5	9.0	3.0	4.0
0.015-0.018	6.0	9.0	3.0	4.0
0.02-0.022	6.0	9.0	3.0	4.5
0.027	6.5	9.0	3.0	5.0
0.03-0.039	7.0	9.0	3.5	5.0
0.047	7.5	9.5	4.0	5.5
0.05	7.5	9.5	4.0	5.5
0.056	8.0	9.5	4.0	6.0
0.068	8.0	10.0	4.5	6.0
0.082	8.5	10.0	5.0	6.5
0.01	9.5	10.0	5.5	6.5
0.012	9.5	10.5	6.0	7.0
0.015	10.0	11.5	5.0	7.5
0.018	10.5	12.5	6.0	8.0
0.022	11.5	12.5	7.0	8.0
0.027	12.0	13.0	8.0	8.5
0.033	13.5	13.0	7.5	10.0
0.039	14.5	13.0	8.0	10.5
0.047	15.5	13.5	9.0	11.5
0.068	16.5	16.0	10.0	11.5

SUPER-MINIATURE / 超小型 CQ92MS

DIMENSIONS / 尺寸 (UNIT : mm)

uF \ VDC	50V/100V			
	W	H	T	P
0.001-0.0018	5.2	5.3	2.8	3.5
0.0022	5.5	5.3	3.0	3.5
0.0027	5.5	5.2	3.0	3.5
0.0033-0.0047	5.2	5.2	3.0	3.5
0.0056-0.0068	5.3	5.5	3.0	3.5
0.0082	5.5	5.5	3.0	3.5
0.01	5.7	5.5	3.5	3.5
0.012	5.9	5.5	3.5	3.5
0.015	6.3	5.5	3.5	3.5
0.018	6.0	5.8	3.5	3.5
0.022	6.8	5.8	3.5	5.0
0.027	7.1	6.7	3.8	5.0
0.033	7.5	6.7	4.2	5.0
0.039	7.8	6.7	4.5	5.0
0.047	8.3	6.7	5.0	5.0
0.056	7.8	8.9	5.0	5.0
0.068	8.1	8.9	5.2	5.0
0.082	8.6	8.9	5.6	5.0
0.1	9.0	8.9	6.1	5.0
0.12	9.0	11.0	6.3	5.0
0.15	9.5	11.5	6.5	5.0
0.18	10.5	11.5	6.5	7.5
0.22	11.0	12.5	7.0	7.5