


METALLIZED DOLYESTER FILM CAPACITOR

FEATURES / 特點

- Non-inductive construction
- Self-healing property
- High density packaging
- Good solderability
- High moisture resistance

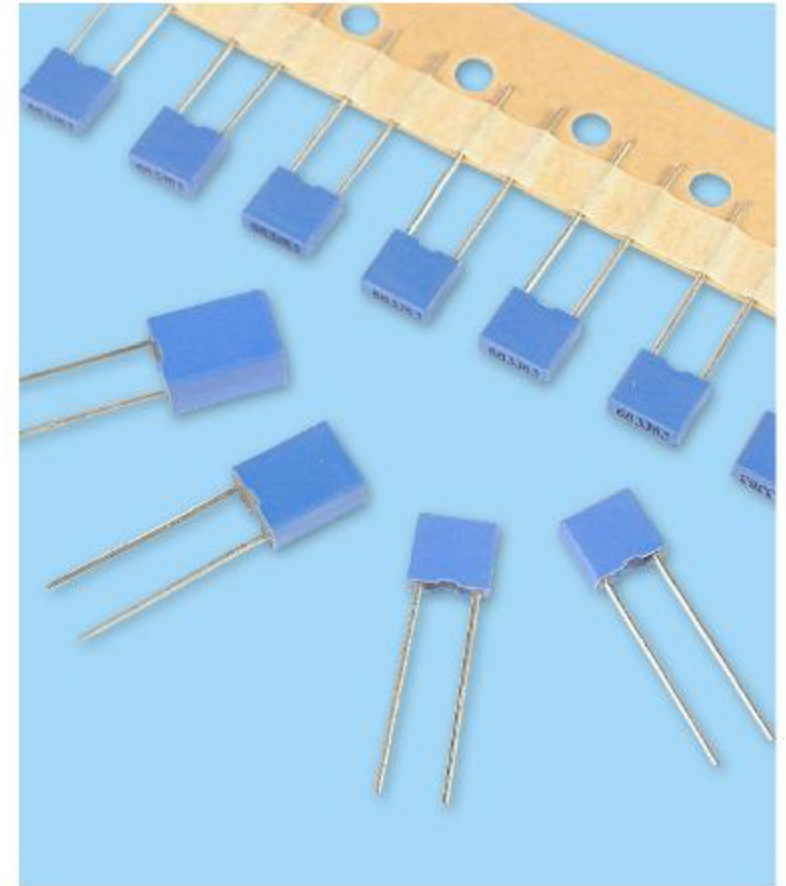

SPECIFICATIONS / 規格

OPERATING TEMPERATURE	-40°C ~ +85°C
RATED VOLTAGE	DC 63V, 100V
CAPACITANCE RANGE	0.001uF to 1.0uF
CAPACITANCE TOLERANCE	± 5%, ± 10%
INSULATION RESISTANCE	>30,000 MΩ (C ≤ 0.33uF) >10,000 MΩ.uF/C (C > 0.33uF)
DIELECTRIC STRENGTH	150% of rated voltage for 5 sec.

DIMENSIONS / 尺寸 (UNIT: mm)

uF \ VDC	63V				100V			
	W	H	T	P	W	H	T	P
0.001	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.0015	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.0022	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.0033	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.0047	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.0068	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.010	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.015	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.022	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.033	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.047	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.068	7.2	6.5	2.5	5.0	7.2	6.5	2.5	5.0
0.10	7.2	6.5	2.5	5.0	7.2	7.5	3.5	5.0
0.15	7.2	7.5	3.5	5.0	7.2	9.5	4.5	5.0
0.22	7.2	7.5	3.5	5.0	7.2	9.5	4.5	5.0
0.33	7.2	9.5	4.5	5.0	7.2	10.0	5.0	5.0
0.47	7.2	9.5	4.5	5.0	7.2	11.0	6.0	5.0
0.68	7.2	11.0	6.0	5.0				
1.0	7.2	11.0	6.0	5.0				