


METALLIZED DOLYESTER FILM CAPACITOR

FEATURES / 特點

- Non-inductive construction
- Self-healing property
- High density packaging
- Good solderability
- High moisture resistance

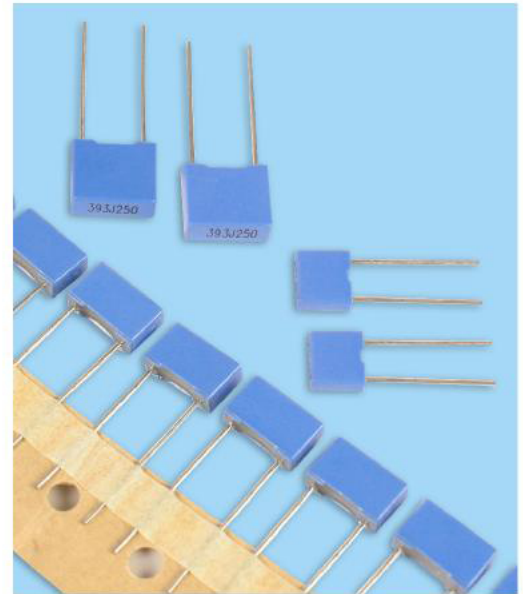

SPECIFICATIONS / 規格

OPERATING TEMPERATURE	-40°C ~ +85°C
RATED VOLTAGE	DC 63V, 100V, 250V, 400V, 630V
CAPACITANCE RANGE	0.001uF to 1.0uF
CAPACITANCE TOLERANCE	±5%, ±10%
INSULATION RESISTANCE	>30,000 MΩ (C ≤ 0.33uF) >10,000 MΩ.uF/C (C >0.33uF)
DIELECTRIC STRENGTH	150% of rated voltage for 5 sec.

DIMENSIONS / 尺寸 (UNIT: mm)

VDC uF	63V				100V				250V				400V				630V			
	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P	W	H	T	P
0.001	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5
0.0015	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5
0.0022	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5
0.0033	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5
0.0047	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5
0.0068	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5
0.010	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5
0.015	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5
0.022	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	11.0	5.0	7.5	10.5	12.0	6.0	7.5
0.033	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	12.0	6.0	7.5	10.5	12.0	6.0	7.5
0.047	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	12.0	6.0	7.5				
0.068	10.5	6.5	3.5	7.5	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5								
0.10	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5								
0.15	10.5	6.5	3.5	7.5	10.5	9.0	4.0	7.5	10.5	12.0	6.0	7.5								
0.22	10.5	9.0	4.0	7.5	10.5	9.0	4.0	7.5	10.5	12.0	6.0	7.5								
0.33	10.5	9.0	4.0	7.5	10.5	11.0	5.0	7.5												
0.47	10.5	11.0	5.0	7.5	10.5	11.0	5.0	7.5												
0.68	10.5	11.0	5.0	7.5	10.5	11.0	5.0	7.5												
1.0	10.5	11.0	5.0	7.5	10.5	12.0	6.0	7.5												