


2.2 浸渍型电容器径向编带说明 Taping for dipped-type capacitor

■ 外形图 Outline Drawing

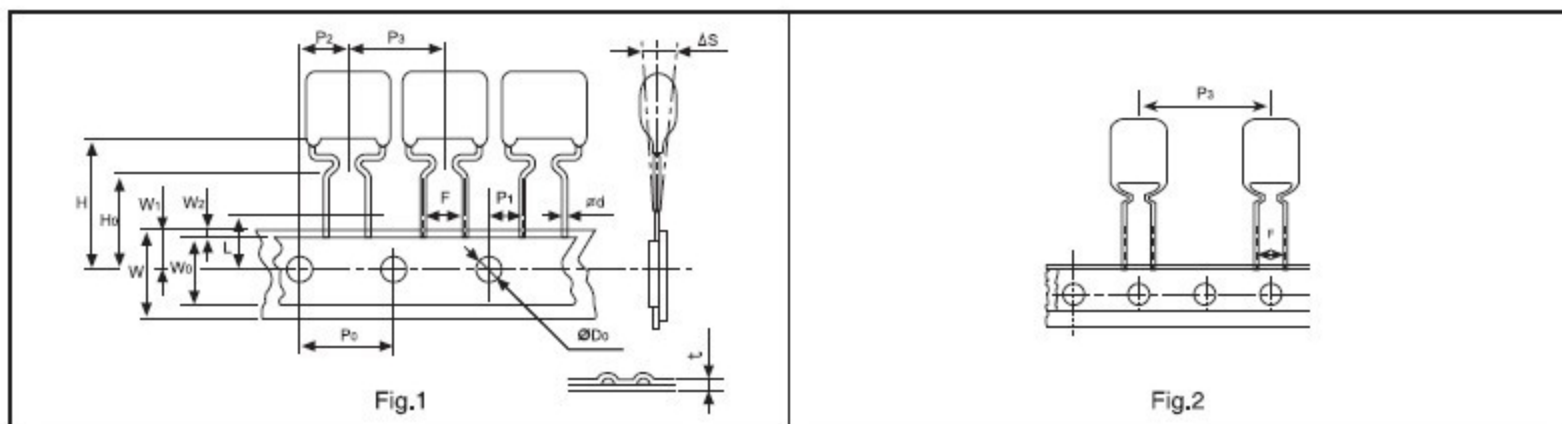

■ 编带尺寸表 Taping Dimensions(mm)

技术指标名称	代号	尺寸(mm)				误差
		P=5.0	P=7.5	P=10.0	P=15.0	
编带类型		Fig 1	Fig 1	Fig 2	Fig 2	
Part number Digit12-15	Ammo-pack	A21A	A31A	A41E	A61E	
电容器间距	P ₃	12.7	12.7	25.4	25.4	±1.0
送带孔距	P ₀	12.7	12.7	12.7	12.7	±0.3
引出线位置	P ₁	3.85	2.60	7.7	5.2	±0.7
电容器本体位置	P ₂	6.35	6.35	12.7	12.7	±1.3
成形间距	F**	5.0	7.5	10.0	15.0	+0.8 -0.2
电容器侧面倾斜	Δs	0	0	0	0	±2.0
电容器高度	H	20.0	20.0	20.0	20.0	±1.0
弯脚高度	H ₀	16.0	16.0	16.0	16.0	±0.5
纸带宽度	W	18.0	18.0	18.0	18.0	+1.0 -0.5
胶带纸宽度	W ₀	10min	10min	10min	10min	
送带孔位置	W ₁	9.0	9.0	9.0	9.0	+0.75 -0.5
胶带纸位置	W ₂	≤3	≤3	≤3	≤3	
送带孔直径	D ₀	4.0	4.0	4.0	4.0	±0.3
编带总厚度	t	0.7	0.7	0.7	0.7	±0.2


Note: * P₀=15.0mm is also available;

* P₀=15.0mm是可行的;

** F can be other lead space;

** F可以是其他间距;

3.3 径向编带包装箱尺寸 (Box size for Ammo-pack)



A=48 ± 3, B=260 ± 3, C=330 ± 3